

**NEW!** | DUO SERIES

# JAB Duo Daylight

AAdynTech's JAB Duo is the most powerful LED soft light in it's class, consuming only 650 watts of power and outputting an amazing 60,000 lumens. The fixture, control box and connecting cable are rated IP65; weatherproof under any condition.

With a CRI of over 92, the JAB Duo creates a beautiful, even field of light in Daylight, Tungsten, or a Variable version that adjusts anywhere from 2800 Kelvin to 6000 Kelvin. Additionally, it has the capability of adding green or magenta to match any other white light fixture.

There are various ways to control the Duo; AAdynTech's User Interface Module, Wired DMX or Wireless DMX, making it very flexible for any kind of production.

Included with the fixture: Control Box, DC Pin Control Cable, User Interface Module, Wireless Receiver, Standard Diffuser Lens, Twist Lock AC Cord, Yoke and Pin.

Accessories include: Travel Case, Lite Diffuser, Heavy Diffuser, Snap Grid, Chimera Pop Bank, Honeycomb Grid.

Like all AAdynTech products, the Duo is designed and manufactured in the United States by Sturdy Corporation, guaranteeing quality and dependable service.



**FEATURES AT A GLANCE:**

- Minus/Plus Green/Magenta Correction
- 92+ CRI across entire brightness range
- Rated IP65
- 220 foot candle output @ 10 feet
- Color Range 5600k
- Auto range voltage - 100/277 VAC-50/60Hz
- Low Power Consumption  
Less than 8a @ 120Vac
- Flicker-free up to 260,000 fps
- Compatible with existing User Interface Modules (UIM)
- Wireless or wired DMX with RDM
- Daisy chain DMX
- Certified ETL, CSA, CE and RoHS compliant
- Operating temperature -20°C to +50°C
- Programmable multiple lightning and strobe effects
- 2 year warranty
- MSRP \$4700



# JAB Duo Daylight

	@10 FEET	@15 FEET	@20 FEET
<b>NO DIFFUSER</b>			
Lux	2,690	1,259	828
Foot Candles	250	117	77
<b>30° DIFFUSER</b>			
Lux	2,519	1,168	683
Foot Candles	239	109	64
<b>55° DIFFUSER</b>			
Lux	2,098	969	570
Foot Candles	195	90	53
<b>80° DIFFUSER</b>			
Lux	1,916	888	538
Foot Candles	178	83	50

## SPECIFICATIONS


Control	Local, UIM, DMX
Source	LED, 5600K CCT, 92+ CRI
Cooling	Passive
Mounting	Baby Pin or Junior
Certifications	ETL, CSA, CE and RoHS Compliant

## FIXTURE DIMENSIONS

Length	464.8 mm	18.3 in
Width	150.9 mm	5.94 in
Height	320.0 mm	12.6 in
Weight	12.5 kg	28 lbs

## CONTROL BOX DIMENSIONS

Length	390.0 mm	15.39 in
Width	188.4 mm	7.42 in
Height	314.2 mm	12.37 in
Weight	11.33 kg	25 lbs



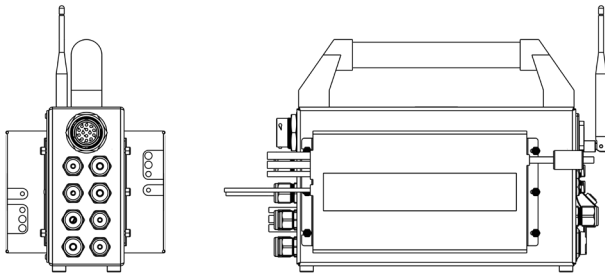


## POWER

Input Voltage	100-277v AC
Input Freq	50/60 Hz
Input Current	650 Watts @ full

## HIGHLIGHTS

- RoHS Compliant
- 220 foot candles @ 10 feet
- IP65 Rated
- Dimmable with no color shift
- No harmful UV or IR radiation

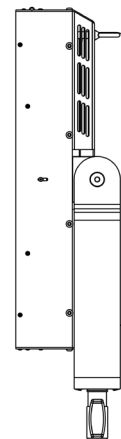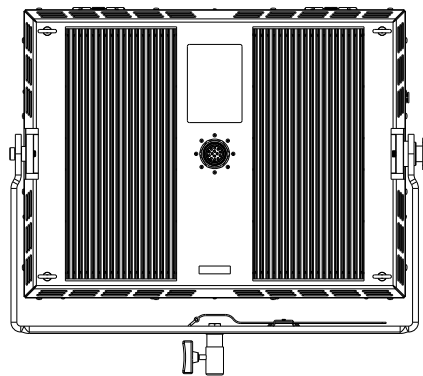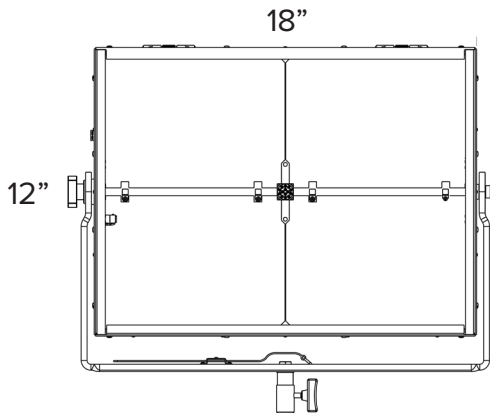

©2023 Sturdy Corporation. All rights reserved. As technical advancements continue, all specifications are subject to change without notice.